




e.vent

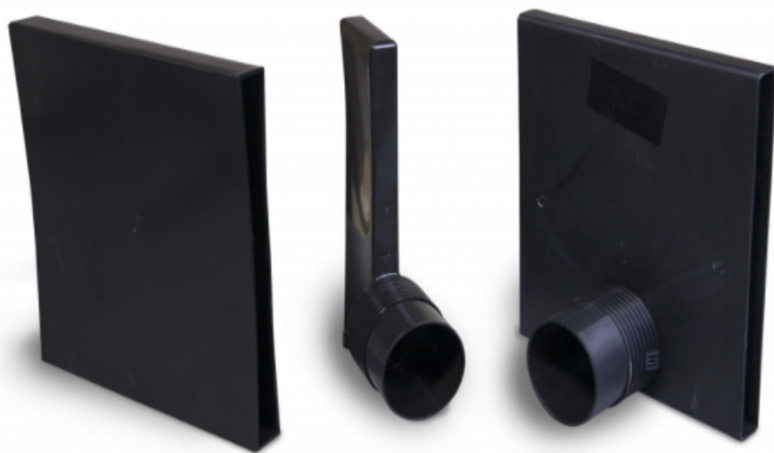

Product Description

Basic Use: Geo-Seal e.vent fittings are utilized with the Geo-Seal Vapor-Vent system to direct and release contaminate vapor to other elements of the contaminant vapor control system including vertical vent risers.

Composition: Geo-Seal e.vent fittings are comprised of high grade polypropylene.

Benefits

- Fittings specially designed to be compatible with the Geo-Seal Vapor-Vent system.
- Versatile fittings allow efficient design of the contaminant vapor control system.
- Outlets fit standard 3" and 4" diameter PVC pipe fittings.
- Quick and easy install, hand tightened and joined.

Limitations

- Not effective when constantly submerged.
- Should be placed within permeable substrates.

Technical Data

Shelf life: Indefinite.

Specification Writer: Contact EPRO before writing specifications on this product. Geo-Seal system assemblies should be reviewed in order to meet project specific site conditions.

Installation

Application: Please refer to manufacturer's specifications. Installation of e.vent fittings shall occur after the preparation of the substrate and prior to the placement of the barrier system. To make an end cap, fold back the fabric at the end of the Vapor-Vent and expose the plastic core. Cut away several rows of core, leaving the fabric in place. Fold fabric back over core and secure with tape to secure end.

Outlet will accommodate 3" or 4" pipe, outer tabs must be removed for use with 4" pipe.

Availability and Packaging

Contact EPRO sales representative for local distributors or authorized applicators (www.eproinc.com).

e.vent fittings are available in the following configurations:

- 12" corner fitting
- 12" end outlet
- 12" side outlet
- 12" splice fitting

Warranty

Limited Warranty: EPRO Services, Inc. believes to the best of its knowledge that performance tables are accurate and reliable. EPRO warrants this product to be free from defects. EPRO makes no other warranties with respect to this product, express or implied, including without limitation the implied warranties of MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. EPRO's liability shall be limited in all events to supplying sufficient product to retreat the specific areas to which defective product has been applied. EPRO shall have no other liability, including liability for incidental or resultant damages, whether due to breach of warranty or negligence. This warranty may not be modified or extended by representatives of EPRO or its distributors.